

Buildex® Headlok®

SECURITY HEAD SCREWS



Product Range

	Description	Part Number	Pack Type	Pack Size
	M6.5 - 10 x 25mm Teks® point with Seal	6-310-3624-4C4	Bulk Box	500
	M6 - 11 x 50mm Zips® point H/G with Seal	6-030-3324-4C4	Bulk Box	1000
	M6.5 - 10 x 50mm Teks® point H/G with Seal	6-310-3625-5C4	Bulk Box	1000
	Security Head Socket	Distribution limited to the installer who must fill out a registration card to ensure traceability of socket location.		

www.aerofast.com.au Aerofast Aust P/L - Brisbane Tel: +61 7 3299 4555 Fax: +61 7 3299 4566
 sales@aerofast.com.au Aerofast Aust P/L - Gold Coast Tel: +61 7 5593 4550 Fax: +61 7 5593 4549

Performance Data

	Single Shear Strength (kN)	Axial Tensile Strength (kN)	Torsional Strength (Nm)
M6.5-10x25mm Teks®	10.9kN	19.7kN	18.5Nm
M6-11x50mm ZIPS®	8.5kN	15.4kN	14.0Nm
M6.5-10x50mm Teks®	10.9kN	19.7kN	18.5Nm

Values given are actual averages obtained under laboratory conditions. Appropriate safety factors should be applied for design purposes.


TW Buildex®
A DIVISION OF ITW AUSTRALIA PTY LTD

A.C.N. 004 235 063 008
A.B.N. 63 004 235 063 008

600 South Road (PO Box 1154)
Moorabbin, Vic 3189 Australia
Telephone : +613 9555 6433
www.buildex.com.au



Visit us at
www.buildex.com.au



For Sales Orders only:
Phone : 1300 368 101
Fax : 1800 456 448

Technical Help Desk:
Phone : 1300 137 273
Fax : 1800 137 272
Email: technicalhelpdesk@buildex.com.au



90 YEARS MANUFACTURING
IN AUSTRALIA

Buildex[®]


Headlok[®]

SECURITY HEAD SCREWS

Security At Every Turn



Made in Australia

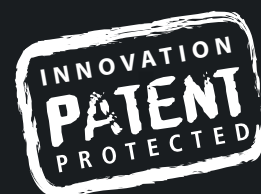

Buildex[®]

Headlok[®]

SECURITY HEAD SCREWS

Introducing **Headlok[®]**, a new range of security head screws from Buildex, Australia's leading manufacturer and supplier of self-drilling screws and fasteners.

Headlok[®] Security Head Screws are designed for securely fastening both metal roofing and cladding profiles, on buildings where the prevention of unauthorized entry and safeguarding of property is of paramount importance. This includes warehouses and shopping centres, government and defence installations, correctional and storage facilities, community centres and water treatment facilities.

Headlok[®] Security Head Screws are tamper-proof because they feature a totally unique head design. They can only be installed or subsequently undone by using the Buildex Security Head Socket. To maintain complete security, distribution of the socket is extremely limited with end-users placed on a registration database to ensure traceability of socket location.



Available head painted to match all popular roofing and cladding colours.


HiGrip[®] design feature prevents the possibility of water entry through the roof sheeting (not available on the 25mm length screw).

ShankGuard[®] design feature protects the fastener shank from scratching and scouring during installation, increasing the corrosion protection.


Available with either a **Teks[®]** or **Zips[®]** drill point for fixing into timber or steel battens

Climaseal[®] 4 coated that meets and exceeds AS3566.2-2002 Class 4, under real world testing.

Headlok Security Head Screws can also be used in conjunction with **Buildex cyclone assemblies**.

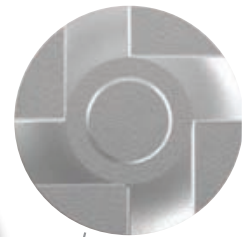

The unique tamper proof security head can only be installed and undone using the **Buildex Security Head Socket**.

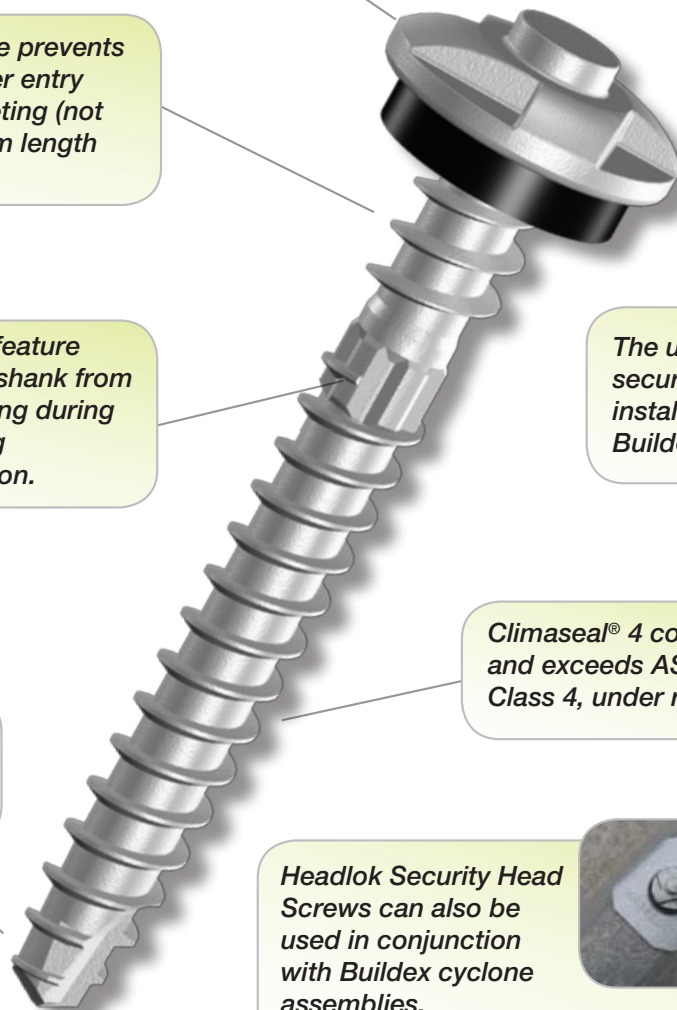



Headlok® Security Head Screws can only be installed and undone using the Buildex Security Head Socket.


Each socket is engraved with its own identifying number which corresponds with the number on a registration card. Installers must fill out their name and address details and sign the registration card, allowing them to become a **Buildex Security Installer**. All details are then registered on a database, allowing for traceability and auditing purposes and providing peace-of-mind on socket location.

Installers undertake to be the sole-owner of the Security Head Socket, to retain possession and to not pass it on to anyone outside of their company. They do however have the option of returning the Security Head Socket back to Buildex upon the completion of the job.




M6.5 x 25mm Teks® Point

For valley fixing corrugated & square rib roofing and cladding profiles to steel purlins & metal battens

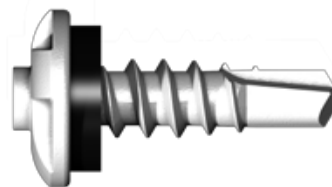

M6 x 50mm Zips® Point

For crest fixing corrugated roofing profiles to timber, thin metal battens and steel purlins up to 1.9mm thick, & square rib roofing profiles to thin metal battens.

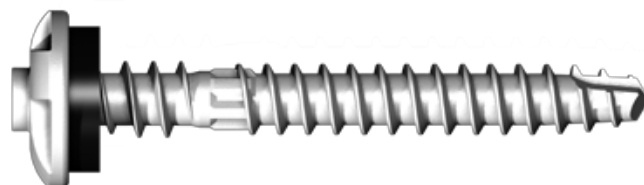

M6.5 x 50mm Teks® Point

For crest fixing corrugated and square rib roofing profiles to steel purlins up to 4.5mm thick (2.4mm lapped purlins), in high wind and cyclonic regions.



Headlok®

SECURITY HEAD SCREWS

Product Features



Unique design feature preventing the possibility of water entry



Design feature which protects the fastener shank from scratching & scouring, increasing the corrosion protection



New coating finish which meets and exceeds AS3566.2-2002 Class 4 under real world conditions



Made in Australia



Available head painted to match all Colorbond® roof colours